




# Our project






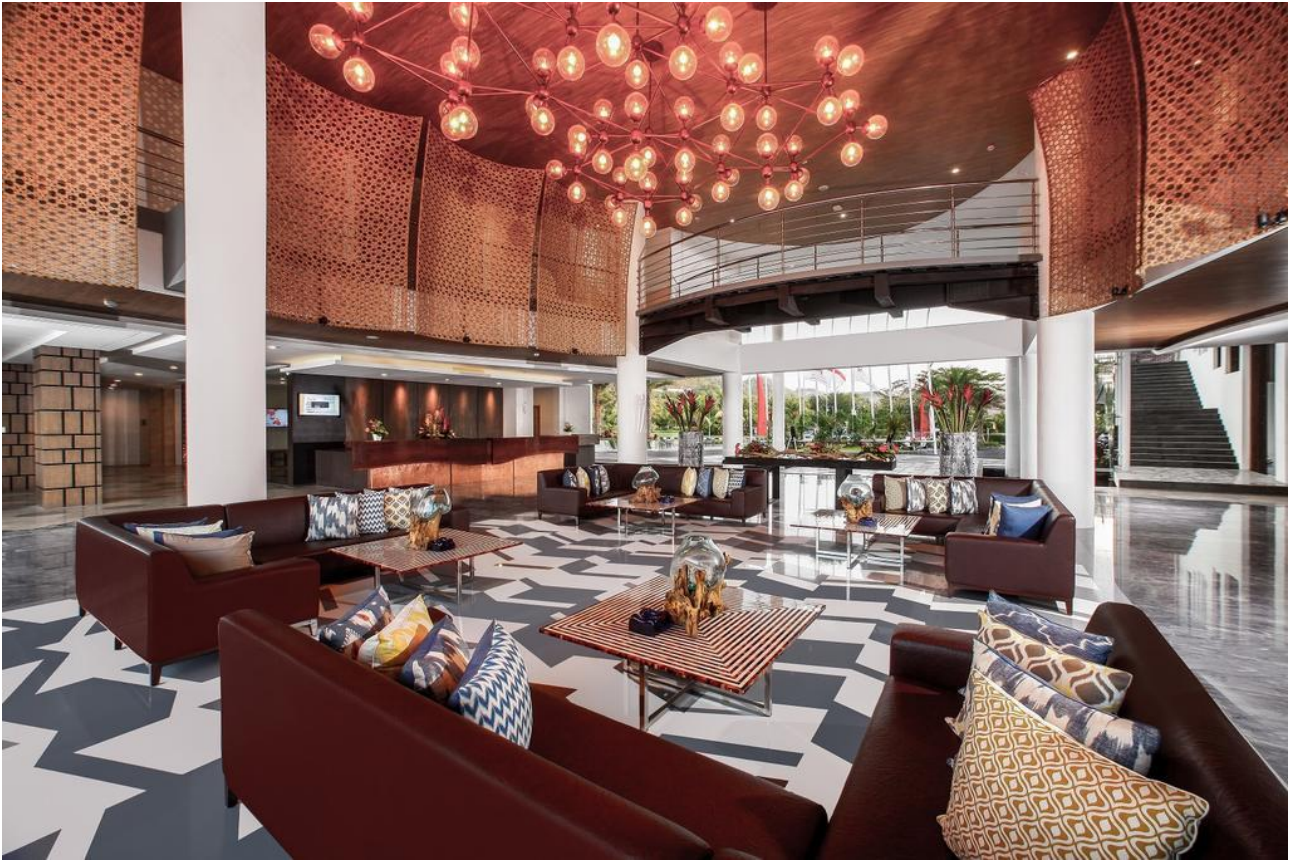





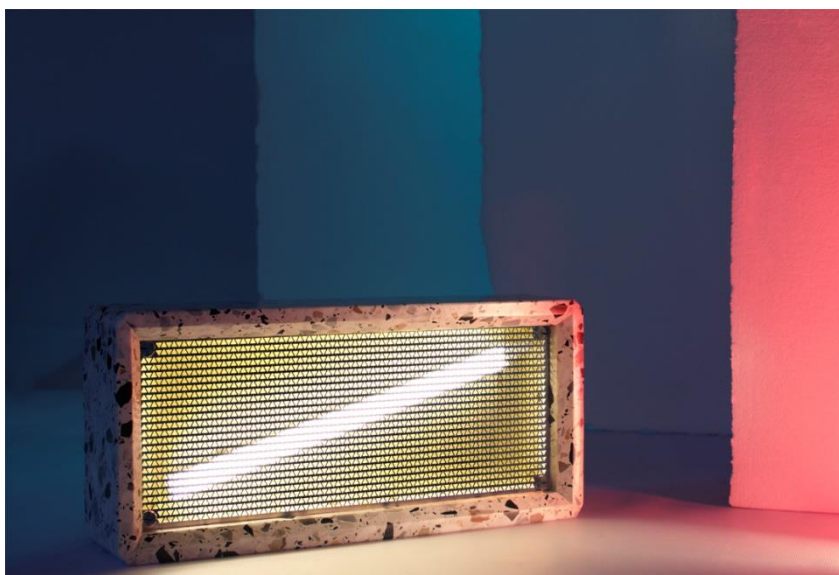




# Our products



# Technical properties

	Specific gravity	2600 kg/ m <sup>3</sup>
	Compressive strength	≥ 9 MPa
	Bending resistance	≥ 60 MPa
	Water absorption	≥ 4 M%
	Abrasion resistance	≥ 20/50 cm
	Anti-slip properties	R9
	Fire resistance	A1 fire resistant

## Standard size

Slabs	305 x 125 – 305 x 140 cm from 2 cm to 8 cm of thickness
Treads and risers	from 2 cm to 8 cm of thickness
Tiles	30 x 30 cm – 50 x 30 cm – 60 x 30 cm 40 x 40 cm – 50 x 50 cm – 60 x 60 cm from 2 cm to 8 cm of thickness
Wall claddings	from 2 cm to 8 cm of thickness
Self-supporting steps	2 + 2 cm – 3 + 3 cm – 4 + 4 cm
Skirting standard size	50 x 7 cm Thickness 1 cm




CARRARA 07



KENHA



ESCO

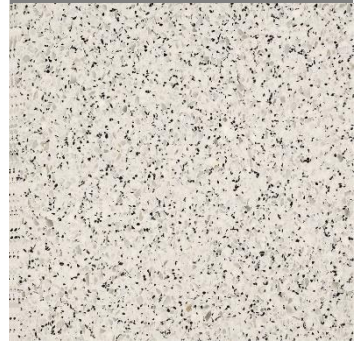


KAFUC




BRECCIA




LIME

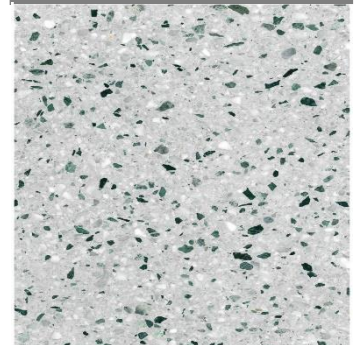

BOTTICINO 07



BOTTICINO 15



PIRA




CARGREY



GRALO




VERDE SCURO

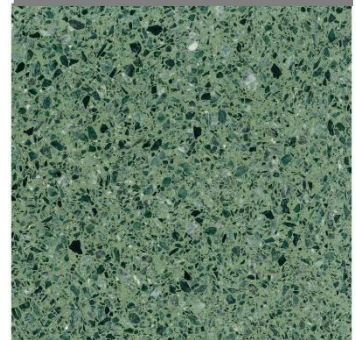





ETNA



VIOLEG



SIBLE




VICENZA




BLAWHI




BILAK




GIALLO REALE



ALPI




BLAMAR



BRAGHI



VENEZIANO



BLACKAN





ALBIEW




ARDOK



CENAS




DEEP OCEAN



GREY SKY



GREY STORM

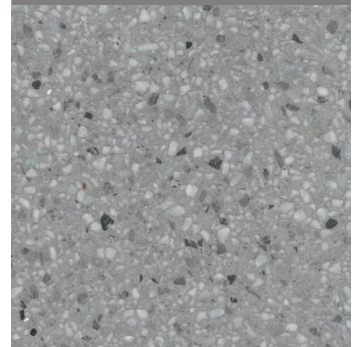

KAVIS



LEVAM




MID OCEAN




NARAK



NAZAN




REVAD

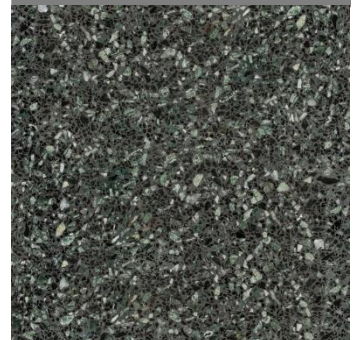



REWLA



ROGRA



ROMEN




SABEN




SABICS



SABIRG



SADEM



VENEZIA



YERGEL



YERGIEW



AKSOB



# Laying instructions

## SUBFLOOR PREPARATION

DOMOS Terrazzo is a single layer agglomerate of marble chips and cement. Prior to installing the Terrazzo please ensure all subfloors are dry, reasonably levelled and clean, we would recommend priming your subfloor where possible.

## WALL AND FLOOR TILES

When installing on cement screed, DOMOS suggests a flexible adhesive would be our recommendation.

When installing tiles bigger than 60 x 60 cm DOMOS suggests a highly deformable adhesive in S2 class. Furthermore, we would recommend double spreading your chosen adhesive as this will improve the bond between our product and the subfloor.

DOMOS would recommend to wait 7 days after installation for the grouting of joints, when grouting we would recommend using a specific elastic product. Please note: to prevent non uniform drying, tension and cracks, it is recommended to cover the tiles with a polyethylene sheet.

It is very important that the materials are not subjected to air currents. Please do get in touch should you recommend more advise on installation materials.

## DISCLAIMER

Please ensure you are satisfied with all aspects of the product (sizes, thicknesses, finishing) Please assess damage before the installation occurs. Domos will not be able to accept responsibility for any defective product which has been installed Regardless. We strongly recommend appropriate protection of all Terrazzo floors, we are not able to accept any responsibility for damage caused by poor floor protection.



# Care and maintenance instructions

## MAINTENANCE

Domos Terrazzo is an agglomerate mixture of marble pieces and white cement. For cleaning and protection care we advise to use products with a neutral pH (7 to 10) as Terrazzo is an acid sensitive product. Avoid contact with products such as vinegar, wine, lemon juice or sanitary cleaners (pH < 7) as these are acid and can damage the surfaces. Also highly alkaline (pH > 10) and solvents or abrasive can damage the surface.

## CLEANING

First time cleaning after having laid the floor is very important to secure a lasting beauty and to maintain the value of the material over many years. After the installation, we advise as soon as possible to remove leftover cement and dirt, an inadequate or late first cleaning can alter the surface appearance.

We would recommend to clean the surfaces with a specific stone care product.

Before proceeding to use stone care products, always follow the manufacturer's instructions.uld you recommend more advise on installation materials.

## PROTECTION

After the first cleaning it is recommended to apply a protective treatment with an impregnator sealer to increase the stain resistance and to make the cleaning easy.

Before grouting and sealing, the terrazzo must be dry. It is necessary to let the material and mortar moisture dry. We would advise a waiting time of 4 to 6 weeks for the complete drying of the Terrazzo. These waiting times are approximate, and may vary depending on weathering and circumstances of project. Before sealing the surfaces, we recommend a thorough clean with a dry time of approx 24 hours, to remove all dirt residue.

NB: it is very important to lay untreated material. An impregnation of the material before the install is not recommended, because the moisture of terrazzo and the of mortar can not dry uniformly. After installation has been completed, the foreign moisture can dry only through the open joints. The possible consequences of a not uniform drying of moisture can be: difference of colour and deformation with cracking. In addition, with an impregnation treatment before the lay, the joints remain untreated, a further treatment would be necessary either way.

## REGULAR CLEANING

For a regular cleaning we advise to use only hot water with a neutral PH detergent



**Domos Agglomerati**  
[www.domosagglomerati.it](http://www.domosagglomerati.it)  
[contact@domosagglomerati.it](mailto:contact@domosagglomerati.it)